

**L 180 system with proximity reader and roller shutter*


Keytracker L (180) Secure System

Electronic Keytracker systems ensure a secure and reliable key management solution to allow approved employees audited access to permitted keys.

- Restricted Access
- 180 Locked key positions (to pre authorised keys only)
- Easy to use web based key management software application
- Auditing facilities with automated email and optional SMS alerting
- LED lights for easy position identification
- Secure anti-tamper cable seals
- Battery Backup and internal memory in the event of power failure
- Mechanical system override
- Networked or Standalone
- 24 months' warranty included
- No Licence Fees for software

Specifications

Key Positions:	180 Locked
Cabinet Dimensions:	1253mm (w) x 832mm (h) x 183mm (d)
Weight:	83kg
Cabinet Material:	1.2mm thick mild steel
Door:	Solid Steel (Standard) Steel door with polycarbonate inspection window Roller shutter, for secure automatic closure Open, for quick access Deep door, for large keys bunches
Colour:	RAL 7016, anthracite grey
ID Fobs:	Locking ID-Security Plug ID-Stainless steel-plug, for a key bunch ID-Stainless steel-Plug, for a single key
Seals:	Anti-tamper seals, Cable Seals (180mm, 200mm, 300mm, 600mm, 1000mm)
Operating Temperature:	- 10°C to + 40°C
Power Supply:	230/240v power supply - recommended to be wired to a fixed and fused mains spur. 230v/240v > 24v
Power Consumption:	85W Max
Battery Backup:	x2 12v 7Ah
Cabinet Access:	P.I.N Code, Card ID, Fingerprint <i>(Optional integration with levo Ultimate fingerprint reader)</i>
Users Per System:	Per application 10,000 <i>(additional at request)</i>
Communications:	Ethernet (TCP/IP)
Mounting:	Wall mounted
Certifications:	CE, TUV

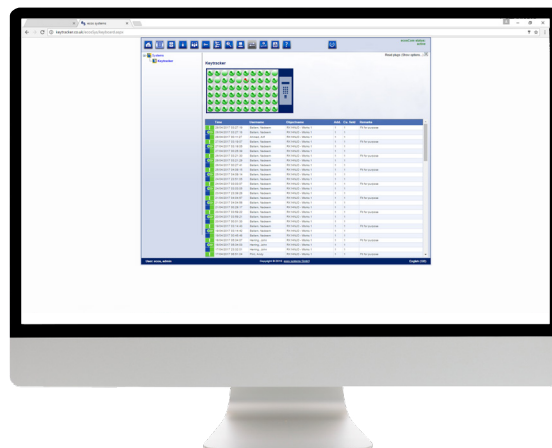

Keytracker Ltd
Station Road, Rowley Regis
West Midlands, B65 0JY
0121 559 9000
sales@keytracker.co.uk
www.keytracker.com